


# TORNILLO CILÍNDRICO CON HEXÁGONO INTERIOR

HEXAGON SOCKET HEAD CAP SCREWS

DIN  
912

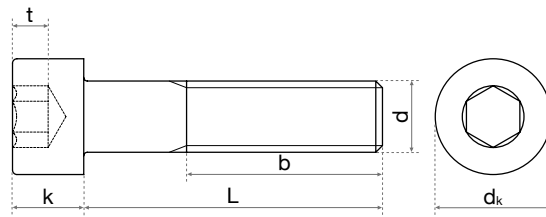

<span style="color: blue;">●</span>	Inox A2
<span style="color: darkblue;">●</span>	Inox A4
<span style="color: limegreen;">●</span>	Acero 8.8
<span style="color: lightgrey;">●</span>	Acero 10.9
<span style="color: black;">●</span>	Acero 12.9

d	M1,6	M2	M2,5	M3	M4	M5	M6
L 3	●●	●●●	●●●				
4	●●	●●●	●●●	●●●●			
5	●●	●●●	●●●	●●●●	●●●●		
6	●●	●●●	●●●	●●●●	●●●●	●●●●	●●●●
8	●●	●●●	●●●	●●●●	●●●●	●●●●	●●●●
10	●●	●●●	●●●	●●●●	●●●●	●●●●	●●●●
12	●●	●●●	●●●	●●●●	●●●●	●●●●	●●●●
14	●●	●●●	●●●	●●●●	●●●●	●●●●	●●●●
16	●●	●●●	●●●	●●●●	●●●●	●●●●	●●●●
18		●●●	●●●	●●●●	●●●●	●●●●	●●●●
20		●●●	●●●	●●●●	●●●●	●●●●	●●●●
22			●●●	●●●●	●●●●	●●●●	●●●●
25			●●●	●●●●	●●●●	●●●●	●●●●
30				●●●●	●●●●	●●●●	●●●●
35				●●●●	●●●●	●●●●	●●●●
40				●●●●	●●●●	●●●●	●●●●
45				●●●●	●●●●	●●●●	●●●●
50				●●●●	●●●●	●●●●	●●●●
55				●●●●	●●●●	●●●●	●●●●
60				●●●●	●●●●	●●●●	●●●●
65				●●●●	●●●●	●●●●	●●●●
70				●●●●	●●●●	●●●●	●●●●
75				●●●●	●●●●	●●●●	●●●●
80				●●●●	●●●●	●●●●	●●●●
85				●●●●	●●●●	●●●●	●●●●
90				●●●●	●●●●	●●●●	●●●●
95				●●●●	●●●●	●●●●	●●●●
100				●●●●	●●●●	●●●●	●●●●
110				●●●●	●●●●	●●●●	●●●●
120				●●●●	●●●●	●●●●	●●●●
130				●●●●	●●●●	●●●●	●●●●
140				●●●●	●●●●	●●●●	●●●●
150				●●●●	●●●●	●●●●	●●●●
160				●●●●	●●●●	●●●●	●●●●
170				●●●●	●●●●	●●●●	●●●●
180				●●●●	●●●●	●●●●	●●●●
190				●●●●	●●●●	●●●●	●●●●
200				●●●●	●●●●	●●●●	●●●●

b*	15	16	17	18	20	22	24
t <sub>min.</sub>	0,7	1	1,1	1,3	2	2,5	3
s	1,5	1,5	2	2,5	3	4	5
k <sub>max.</sub>	1,6	2	2,5	3	4	5	6
dk	3	3,8	4,5	5,5	7	8,5	10


\*Longitud constante de la rosca (siempre L superior a b)  
Medidas indicadas en mm



# TORNILLO CILÍNDRICO CON HEXÁGONO INTERIOR

HEXAGON SOCKET HEAD CAP SCREWS

DIN  
912

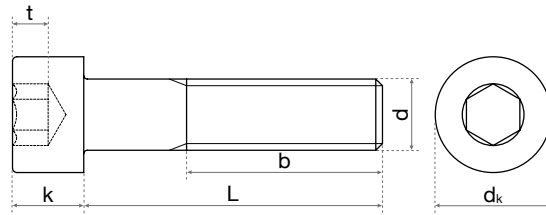

<span style="color: blue;">●</span>	Inox A2
<span style="color: darkblue;">●</span>	Inox A4
<span style="color: limegreen;">●</span>	Acero 8.8
<span style="color: grey;">●</span>	Acero 10.9
<span style="color: black;">●</span>	Acero 12.9

d	M27	M30	M33	M36	M39	M42	M45	M48
L 50	●●●●●	●●●●●						
55	●●●●●	●●●●●						
60	●●●●●	●●●●●	●●●●	●●●●				
65	●●●●●	●●●●●	●●●●	●●●●				
70	●●●●●	●●●●●	●●●●	●●●●	●●	●●●●		
75	●●●●●	●●●●●	●●●●	●●●●	●●	●●●●		
80	●●●●●	●●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
85	●●●●●	●●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
90	●●●●●	●●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
100	●●●●●	●●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
110	●●●●●	●●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
120	●●●●●	●●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
130	●●●●●	●●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
140	●●●●●	●●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
150	●●●●●	●●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
160	●●●●	●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
170	●●●●	●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
180	●●●●	●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
190	●●●●	●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
200	●●●●	●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
210	●●●●	●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
220	●●●●	●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
230	●●●●	●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
240	●●●●	●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
250	●●●●	●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
260	●●●●	●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
270	●●●●	●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
280	●●●●	●●●●	●●●●	●●●●	●●	●●●●	●	●●●●
300	●●●●	●●●●	●●●●	●●●●	●●	●●●●	●	●●●●

b*	66	72	78	84	90	96	100	108
t <sub>min.</sub>	13,5	15,5	18	19	21	24	26	28
s	19	22	24	27	27	32	32	37
k <sub>max.</sub>	27	30	33	36	39	42	45	48
dk	40	45	50	54	58	63	68	72

\*Longitud constante de la rosca (siempre L superior a b)  
Medidas indicadas en mm